


SINGLE ACTION COMPENSATORS

- A) n. 1 heat-shrinkable polyethylene mechanically enlarged cap;
 B) Sealing mastic;
 C) n. 1 heat-shrinkable ring;
 D) n. 1 venting plugs;
 E) n. 1 welding plugs*;
- Steel cap;
 - Polyurethane metered components for "in place" insulation;
 - Electric set [wires, spacers, connectors, etc.] for the connection to the surveillance system, if required.

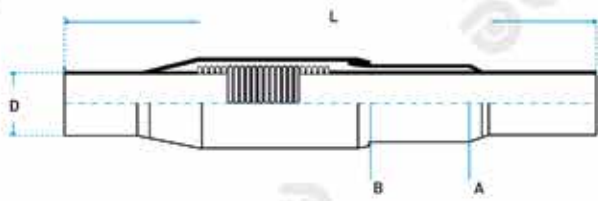

D (DN)	L [mm]	Corsa [A-B] [mm]
40	450	50
50	450	50
65	500	70
80	500	70
100	550	80
125	550	80
150	630	100
200	700	120
250	700	120
300	730	140
350	730	140
400	730	140
450	800	150
500	800	150
600	800	150

WARNINGS: dimensions may be slightly modified due to the improvement of production standards. The tolerances are those required by the reference standards. If necessary, contact our TECHNICAL OFFICE for data confirmation.